



OSB12 - SWIMMING STARTING PLATFORM

OVERVIEW

OSB12 presents a powerful new patented feature, revolutionising the way the swimmers start from their blocks.

Diving from the starting block with the body propelled by the knee at a 90° angle drastically increases the explosiveness of the start.

Physical tests undertaken by top level swimmers showed faster races versus a standard block.

OSB12 Starting Blocks have been tested by world-class swimmers, who have helped to specify the optimum angles of both the platform and the footrest for racing starts.

Design research also applied to the top surfaces, very comfortable yet rough enough to guarantee the swimmer a feeling of total security.


The length of the platform is extended to 74 cm to accommodate the new styles of start.

OSB12 can be mounted or adapted to almost any type of existing starting blocks.

TOP FEATURES

- Adjustable footrest
- FINA compliance
- Small footprint
- Anti-slip surface
- Extended platform surface
- Easy handgrip
- Available in several RAL colors (S = standard)

5017 (S)	9005	3002	7010	1014
.BL	.BK	.RD	.GY	.IV

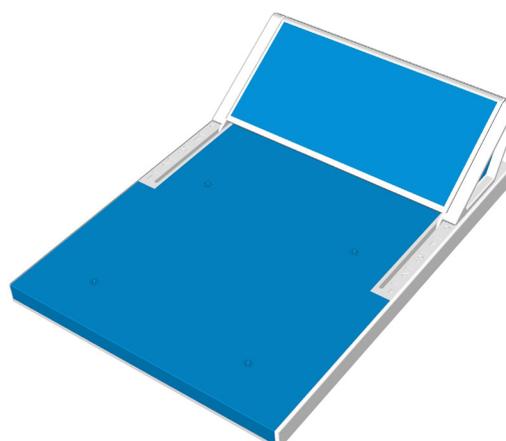

AVAILABLE VERSIONS

Two versions are available:

- With Relay Break Detection System (RBD)
- Standard version


Both versions have the same base and top, providing an affordable and evolutive solution: a basic system can be upgraded later to an RBD system.

The footrest can be freely adjusted in length, or disassembled with standard tools..

AVAILABLE OSB11 STARTING BLOCKS SETS

Set of 4 with RBD	3454.954.TS
Set of 4 simple	3454.964.TS
Set of 5 with RBD	3454.955.TS
Set of 5 simple	3454.965.TS
Set of 6 with RBD	3454.956.TS
Set of 6 simple	3454.966.TS
Set of 8 with RBD	3454.958.TS
Set of 8 simple	3454.968.TS
Set of 10 with RBD	3454.960.TS
Set of 10 simple	3454.970.TS

DIMENSIONS

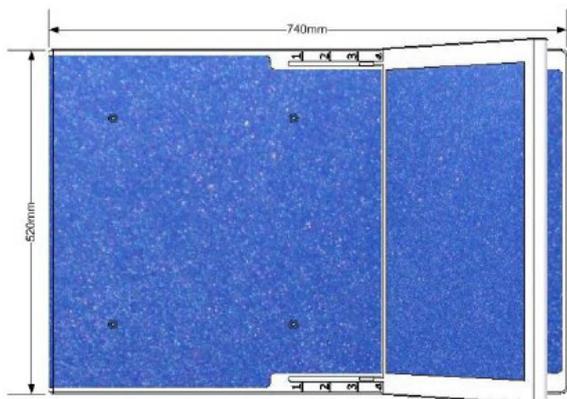

SPECIFICATIONS

Article number	3454.702.TS.BL (with RBD)
	3454.9703.TS.BL (standard)
Platform size	740 x 520 mm (L x W)
Material	fibreglass
Weight	22 kg
RBD contacts	N.O. , max. 100 mA / 12 V
RBD connection	cable with 2x banana plugs
Certifications	RoHS compliant FINA approved

OPTIONS


Dynamometer

- Dynamometer (for calibration of the RBD) (9051.1015)

COLORS




3454.702-3.TS RD



3454.702-3.TS IV



3454.702-3.TS BK



3454.702-3.TS GY



3454.702-3.TS BL

Intellectual property of Swiss Timing. All rights reserved, especially those of reproduction and distribution to third parties.